


**HAPCO**  
**Pipe Hanger Brackets**

<b>PART SIZE</b>	<b>PART NUMBER</b>	<b>HANGER ROD SIZE</b>	<b>MAX LOAD</b>	<b>WT (Lbs.)</b>
2-1/2	G260-2-8	3/8	1130	0.85
3	G260-3	1/2	1130	0.95
4	G260-4	5/8	1430	1.35
5	G260-5	5/8	1430	1.82
6	G260-6	3/4	1940	2.74
8	G260-8	3/4	2000	4.15
10	G260-10	7/8	3600	7.25
12	G260-12	7/8	3800	10.8
14	G260-14	1	4200	12.4
16	G260-16	1	4600	19.85
18	G260-18	1	4800	22.25
20	G260-20	1-1/4	4800	40.33
24	G260-24	1-1/4	4800	49.83
30	G260-30	1-1/4	6000	70.18

*\*For price information see Section 2 Page 13*

*\*Note: Estimated weight only*

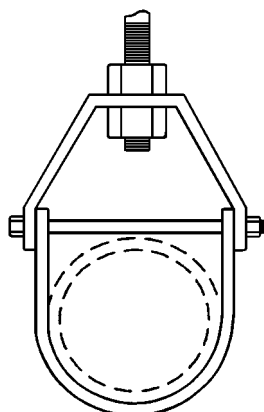

**Features:**

- **Approvals:** Complies with Federal Specification WW-H-171
- **Installation:** Hanger load nut above clevis must be tightened securely to assure proper hanger performance, when a oversized clevis is used, a nipple should be placed over the clevis bolt as a spacer to assure the lower U-Strap will not move in on the bolt
- Design has yoke on outside of lower U-Strap so yoke cannot slide toward center of bolt, thus bending of bolt is minimized

**Threaded Rod**

<b>PART SIZE</b>	<b>NUMBER</b>
3/8"	63-375
1/2"	63-500
5/8"	63-625
3/4"	63-750
7/8"	63-875
1"	63-100
1-1/4"	63-1250

*\*For price information see Section 2 Page 12*