

## HAPCO


### Residential Grade Marine VMS Series

#### Compact Design - End Inlet - End Outlet

| MODEL<br>INLET SIZE | DWG #   | A   | B  | C  | D     | E     | WT<br>(Lbs.) |
|---------------------|---------|-----|----|----|-------|-------|--------------|
| 528VMS2             | 2400A-1 | 2   | 5  | 28 | 35    | 3.5   | 19           |
| 635VMS2-8           | 2401A-1 | 2.5 | 6  | 35 | 43    | 4     | 39           |
| 740VMS3             | 2402A-1 | 3   | 7  | 40 | 48    | 4     | 56           |
| 848VMS3-8           | 2403A-1 | 3.5 | 8  | 48 | 56.75 | 4.375 | 62           |
| 948VMS4             | 2404A-1 | 4   | 9  | 48 | 56.75 | 4.375 | 87           |
| 1148VMS5            | 2405A-1 | 5   | 11 | 48 | 56.75 | 4.375 | 110          |
| 1154VMS6            | 2406A-1 | 6   | 11 | 54 | 63.75 | 4.875 | 148          |
| 1457VMS8            | 2407A-1 | 8   | 14 | 57 | 66.75 | 4.875 | 208          |
| 1874VMS10           | 2408A-1 | 10  | 18 | 74 | 88    | 7     | 345          |
| 2280VMS12           | 2409A-1 | 12  | 22 | 80 | 95    | 7.5   | 485          |
| 2490VMS14           | 2410A-1 | 14  | 24 | 90 | 105.5 | 7.75  | 630          |
| 2896VMS16           | 2411A-1 | 16  | 28 | 96 | 112   | 8     | 760          |

\*For price information see Section 2 Page 2

\*Note Estimated weight only

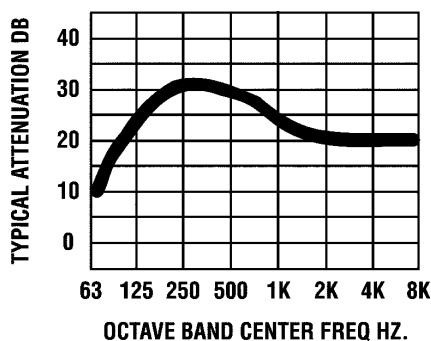

#### Recommended Applications:

- Diesel exhaust on Marine applications where the silencer exhaust diameter is limited

#### Features:

- Attenuation 18 - 26 dBA
- All welded steel or optional stainless steel
- High temperature primer and paint
- Flanged connections

#### Accessories:

- Flexible Connectors
- Mounting Bands
- Hanger Brackets
- Gaskets HiTemp
- Nuts & Bolts
- Flanges
- Wye Connectors
- Optional materials available like Corten and Stainless Steel
- Explosion Relief Vents
- Inspection Ports
- Wall & Roof Thimbles
- Insulated Blankets
- Mitered Exhaust Pipe Extension with Bird Screen
- Rain Caps
- Flanged Spools

