


**HAPCO**  
**Industrial Grade - M Series**  
**End Inlet - End Outlet**

INLET SIZE MODEL	DWG #	A	B	C	D	E & F	WT (Lbs.)
M512-1-4	2700A-1	1.25	5	12	17.5	2.75	5
M612-1-8	2701A-1	1.5	6	12	17.5	2.75	9
M712-2	2702A-1	2	7	12	17.5	2.75	11.5
M715-2-8	2703A-1	2.5	7	15	21	3	14
M822-3	2704A-1	3	8	22	28.75	3.375	18
M924-3-8	2705A-1	3.5	9	24	31.75	3.875	37
M926-4	2706A-1	4	9	26	33.75	3.875	40
M1030-5	2707A-1	5	10	30	37.65	3.825	47
M1030-5-8	2708A-1	5.5	10	30	37.65	3.825	48
M1236-6	2709A-1	6	12	36	45.65	4.875	86
M1852-8	2710A-1	8	18	52	66	7	176
M2060-10	2711A-1	10	20	60	74.5	7.25	242
M2468-12	2712A-1	12	24	68	82	7	380
M2872-14	2713A-1	14	28	72	88.75	8.375	470
M3074-16	2714A-1	16	30	74	91	8.5	640
M3676-18	2715A-1	18	36	76	96.5	10.25	700
M4278-20	2716A-1	20	42	78	101.25	11.625	760
M4280-22	2717A-1	22	42	80	103.25	11.625	820
M4885-24	2718A-1	24	48	85.5	112	13.25	960
M5495-26	2719A-1	26	54	95.5	124	14.25	1100

\*For price information see Section 2 Page 1

\*Note Estimated weight only

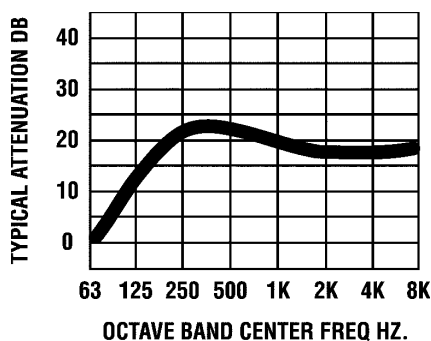

**Recommended Applications:**

- Construction
- Logging
- Oil Fields
- Irrigation Pumps
- Other industrial applications where background noise is relatively high
- Rock Crusher Facilities
- Mining Type Industries

**Features:**

- Attenuation 15 - 22 dBA
- Heavy duty all welded steel construction
- Inlet size 1.25" through 3.0" threaded or slip fit, larger size slip fit or flanged

**Accessories:**

- Flexible Connectors
- Mounting Bands
- Hanger Brackets
- Gaskets HiTemp
- Nuts & Bolts
- Flanges
- Wye Connectors
- Optional materials available like Corten and Stainless Steel
- Explosion Relief Vents
- Inspection Ports
- Wall & Roof Thimbles
- Insulated Blankets
- Mitered Exhaust Pipe Extension with Bird Screen
- Rain Caps
- Flanged Spools

