


**HAPCO**  
**Industrial Grade - M Series Exhaust Silencer**  
**Side Inlet - End Outlet**

SIZE MODEL	DWG #	A	A1	B	C	D	E	F	G	H	I	J	WT (Lbs.)
M720-2-8 SI	2900A-1	2.5	2.5	7	20	27.5	0.5	7	3	4	17	24.5	18
M824-3 SI	2901A-1	3	3	8	24	32	0.875	7	3.5	4	20.5	28.5	30
M928-3-8 SI	2902A-1	3.5	3.5	9	28	37.875	0.875	9	4	4	24	34	37
M1028-4 SI	2903A-1	4	4	10	28	39	0.875	10	4	4	24	35	50
M1130-5 SI	2904A-1	5	5	11	30	43	0.875	12	6	4	24	37	77
M1236-6 SI	2905A-1	6	6	12	36	53	0.875	16	6	4	30	47	83
M2054-8 SI	2906A-1	8	8	20	54	75.25	3.25	18	11.25	6	42.75	64	237
M2464-10 SI	2907A-1	10	10	24	64	85.75	3.75	18	12.75	6	51.25	73	369
M2872-12	2908A-1	12	12	28	72	96.375	4.375	20	14.5	6	57.5	81.875	548
M3080-14 SI	2909A-1	14	14	30	80	108.5	4.5	24	15.5	6	64.5	93	797
M3690-16 SI	2910A-1	16	16	36	90	119.25	5.25	24	17.25	6	72.75	102	985
M3896-18 SI	2911A-1	18	18	38	96	130	6	28	19	6	77	111	1150

\*For price information see Section 2 Page 1

\*Note Estimated weight only

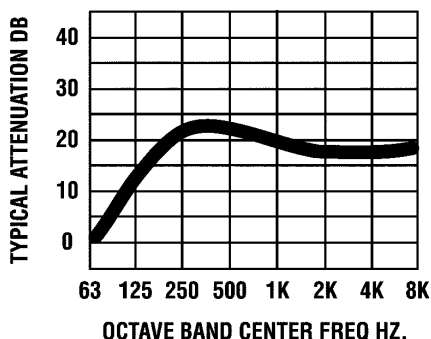


**Recommended Applications:**

- Construction
- Logging
- Oil Fields
- Irrigation Pumps
- Areas where background noise is relatively high

**Features:**

- Attenuation 15 - 22 dBA
- Bird screen on outlet end included
- Heavy duty welded
- High temperature primer and paint
- Inlet connections pipe thread to 3.5", larger sizes flanged
- NOTE: OEM units may be manufactured with slip fit inlets on all sizes
- Dimension "J" may be changed to conform with engine specifications

\*NOTE: BIRD SCREEN ON OUTLET END

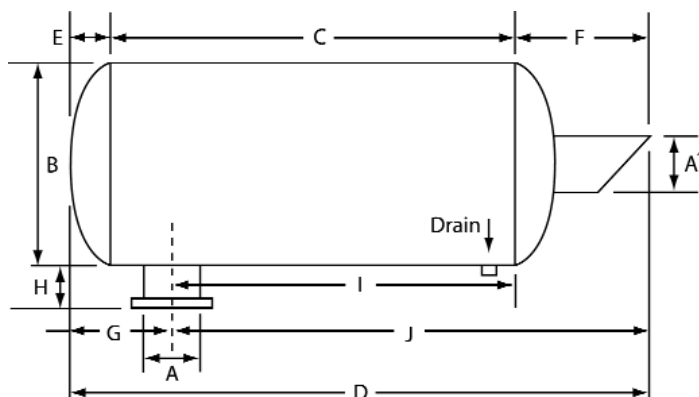

**Accessories:**

- Flexible Connectors
- Mounting Bands
- Hanger Brackets
- Gaskets HiTemp
- Nuts & Bolts
- Flanges
- Wye Connectors
- Optional materials available like Corten and Stainless Steel
- Explosion Relief Vents
- Inspection Ports
- Wall & Roof Thimbles
- Insulated Blankets
- Mitered Exhaust Pipe Extension with Bird Screen
- Rain Caps
- Flanged Spools