


HAPCO
Spark Arrestor

SIZE MODEL	DWG #	A INLET	A1 OUTLET	B	C	WT (Lbs.)	CFM MAX.
1AA	3300A-1	.75 - 1.5 ID	1.75 OD	3.5	6	3	96
1AAXH	3301A-1	.75 - 1.5 ID	1.25 OD	3.5	6	3	76
2AA	3302A-1	1.0 - 1.75 ID	2 OD	4.5	6.5	3	167
2AAH	3303A-1	1.0 - 1.75 ID	1.75 OD	4.5	6	3	112
3AA	3304A-1	1.50 - 2.5 ID	2.5 OD	6	9.5	5	265
3AAXH	3305A-1	1.50 - 2.5 ID	2.5 OD	6	9	5	258
4AA	3306A-1	1.75 - 3 ID	3 OD	7	11.5	8	485
4AAH	3307A-1	1.75 - 2.625 ID	3 OD	7	11	8	417
5AA	3308A-1	2.50 - 4 ID	4 OD	9.25	12	10.5	705
5AAH	3309A-1	2.50 - 4 ID	4 OD	9.25	11.5	11	620
6AA	3310A-1	3.50 - 4.5 ID	4 OD	9.25	14	12	717
6AAH	3311A-1	3.50 - 4.5 ID	4 OD	9.25	14	12	848
6AB	3312A-1	3.50 - 5 ID	5 OD	9.25	14	13	1168
7AC1	3313A-1	4.0 - 6.75 ID	6 OD	10	12.5	26	1555
8AC *	3314A-1	6 - 8 ID	8 OD	16	16	42	2930
10AC *	3315A-1	8 - 12 ID	12 OD	18	14	89	5000
12AC	3316A-1	12 - 16 ID	14 OD	20	15	131	8000

*For price information see Section 2 Page 9

*Note Estimated weight only

***Tested At The Factory Only**

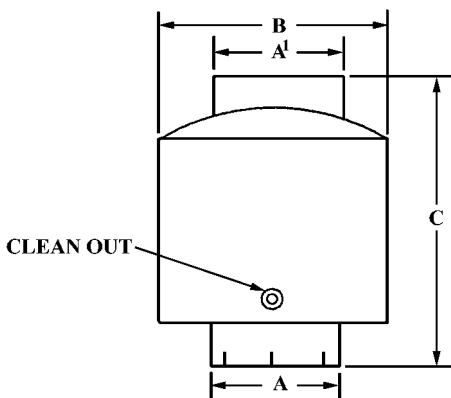

Recommended Applications:

- All models listed are rated and qualified by U.S. Forest Service Test Center under STD. 5100-1 and Department of Defense SPEC. MIL. A-27302A

Features:

- Attenuation 6 - 10 dBA
- All sizes with (H) indicates horizontal position except for 7AC, this model is qualified in vertical and horizontal position
- All sizes are available in 304 / 316 S.S.
- Available in pipe thread, slip fit and flanged connections
- Clamp included
- Outlet can be reduced to match inlet


Accessories:

- Weather Stops

OPTIONAL WEATHER STOPS

WEATHER STOP PART#	STACK SIZE	SPARK ARRESTOR SIZE
#32	UP TO 2-1/2	1AA - 2AA
#44	2-9/16 TO 3-1/8	3AA - 4AA
#64	3-3/16 TO 4-3/4	5AA
#80	4-7/8 TO 5-1/2	6AB
#96	5-5/8 TO 6-1/2	7AC1
#104	6-5/8 TO 7	
#120	7-1/8 TO 7-7/8	
#132	8 TO 8-3/4	

- Stainless Steel Clamp
- Aluminized Steel Cap
- Brass Bushing Hinge
- Adjustable Clamp
- Lightweight
- Adjustable Sizes



*For price information see Section 2 Page 9