


HAPCO
Industrial Grade - M Series
End Inlet - End Outlet

INLET SIZE MODEL	DWG #	A	B	C	D	E & F	WT (Lbs.)
M512-1-4	2700A-1	1.25	5	12	17.5	2.75	5
M612-1-8	2701A-1	1.5	6	12	17.5	2.75	9
M712-2	2702A-1	2	7	12	17.5	2.75	11.5
M715-2-8	2703A-1	2.5	7	15	21	3	14
M822-3	2704A-1	3	8	22	28.75	3.375	18
M924-3-8	2705A-1	3.5	9	24	31.75	3.875	37
M926-4	2706A-1	4	9	26	33.75	3.875	40
M1030-5	2707A-1	5	10	30	37.65	3.825	47
M1030-5-8	2708A-1	5.5	10	30	37.65	3.825	48
M1236-6	2709A-1	6	12	36	45.65	4.875	86
M1852-8	2710A-1	8	18	52	66	7	176
M2060-10	2711A-1	10	20	60	74.5	7.25	242
M2468-12	2712A-1	12	24	68	82	7	380
M2872-14	2713A-1	14	28	72	88.75	8.375	470
M3074-16	2714A-1	16	30	74	91	8.5	640
M3676-18	2715A-1	18	36	76	96.5	10.25	700
M4278-20	2716A-1	20	42	78	101.25	11.625	760
M4280-22	2717A-1	22	42	80	103.25	11.625	820
M4885-24	2718A-1	24	48	85.5	112	13.25	960
M5495-26	2719A-1	26	54	95.5	124	14.25	1100

*For price information see Section 2 Page 1

*Note Estimated weight only

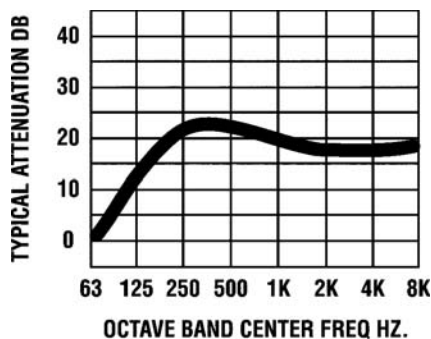

Recommended Applications:


- Construction
- Logging
- Oil Fields
- Irrigation Pumps
- Other industrial applications where background noise is relatively high
- Rock Crusher Facilities
- Mining Type Industries

Features:

- Attenuation 15 - 22 dBA
- Heavy duty all welded steel construction
- Inlet size 1.25" through 3.0" threaded or slip fit, larger size slip fit or flanged

Accessories:

- Flexible Connectors
- Mounting Bands
- Hanger Brackets
- Gaskets HiTemp
- Nuts & Bolts
- Flanges
- Wye Connectors
- Optional materials available like Corten and Stainless Steel
- Explosion Relief Vents
- Inspection Ports
- Wall & Roof Thimbles
- Insulated Blankets
- Mitered Exhaust Pipe Extension with Bird Screen
- Rain Caps
- Flanged Spools

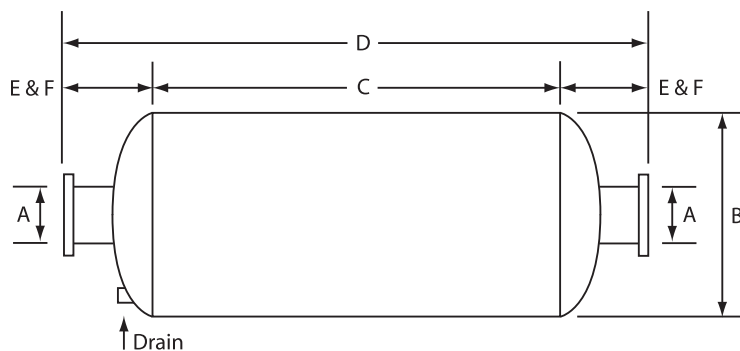


HAPCO
Industrial Grade - M Series
Side Inlet

SIZE INLET MODEL	DWG #	A	B	C	D	E	F	G	H	I	WT (Lbs.)
M612-1-8 SI	2800A-1	1.5	6	12	15.25	0.5	2.75	2	2.5	13.25	11.5
M716-2 SI	2805A-1	2	7	16	19	0.5	2.5	2.5	2.5	16.5	18
M720-2-8 SI	2801A-1	2.5	7	20	23	0.5	2.5	3	2.5	20	20
M822-3 SI	2802A-1	3	8	22	25.75	0.75	3	3.375	3	22.375	29
M928-3-8 SI	2803A-1	3.5	9	28	31.75	0.75	3	3.875	3	27.87	37
M1028-4 SI	2804A-1	4	10	28	32.375	0.875	3.5	4	4	28.375	60
M1130-5 SI	2805A-1	5	11	30	34.375	0.875	3.5	6	4	28.375	75
M1236-6 SI	2806A-1	6	12	36	41.75	0.875	4.875	6	4	35.75	86
M2054-8 SI	2807A-1	8	20	54	64.5	3.25	7.25	11.25	4	53.25	190
M2464-10 SI	2808A-1	10	24	64	75.5	3.75	7.75	12.75	4	61.75	369
M2872-12 SI	2809A-1	12	28	72	84.75	4.375	8.375	14.5	4	70.25	455
M3080-14 SI	2810A-1	14	30	80	93	4.5	8.5	15.5	4	77.5	685
M36106-16 SI	2811A-1	16	36	106	120.5	5.25	9.25	17.25	5	103.25	1031
M38116-18 SI	2812A-1	18	36	116	131.25	5.25	10	18.25	5	113	1264
M42104-20 SI	2813A-1	20	42	104	121.25	6.625	10.625	26.125	5	95.125	1400
M42112-22 SI	2814A-1	22	42	112	129.25	6.625	10.625	27	5	102.25	1450
M48122-24 SI	2815A-1	24	48	122	142.5	8.25	12.25	29.75	5	112.75	1600
M54126-26 SI	2816A-1	26	54	126	148.25	10	12.25	32.5	5	115.75	1800

*For price information see Section 2 Page 1

*Note Estimated weight only

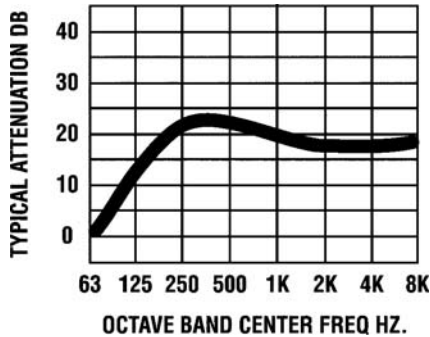

Recommended Applications:


- Construction
- Logging
- Oil Fields
- Irrigation Pumps
- Other industrial applications where background noise is relatively high
- Rock Crusher Facilities
- Mining Industries

Features:

- Attenuation 15 - 22 dBA
- Heavy duty all welded steel construction
- Inlet size 1.25" through 3.0" threaded or slip fit, larger size slip fit or flanged

Accessories:

- Flexible Connectors
- Mounting Bands
- Hanger Brackets
- Gaskets HiTemp
- Nuts & Bolts
- Flanges
- Wye Connectors
- Optional materials available like Corten and Stainless Steel
- Explosion Relief Vents
- Inspection Ports
- Wall & Roof Thimbles
- Insulated Blankets
- Mitered Exhaust Pipe Extension with Bird Screen
- Rain Caps
- Flanged Spools

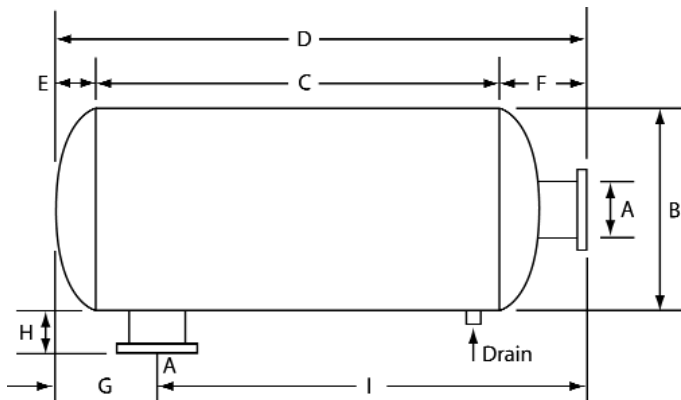


HAPCO
Industrial Grade - M Series Exhaust Silencer
Side Inlet - End Outlet

SIZE MODEL	DWG #	A	A1	B	C	D	E	F	G	H	I	J	WT (Lbs.)
M720-2-8 SI	2900A-1	2.5	2.5	7	20	27.5	0.5	7	3	4	17	24.5	18
M824-3 SI	2901A-1	3	3	8	24	32	0.875	7	3.5	4	20.5	28.5	30
M928-3-8 SI	2902A-1	3.5	3.5	9	28	37.875	0.875	9	4	4	24	34	37
M1028-4 SI	2903A-1	4	4	10	28	39	0.875	10	4	4	24	35	50
M1130-5 SI	2904A-1	5	5	11	30	43	0.875	12	6	4	24	37	77
M1236-6 SI	2905A-1	6	6	12	36	53	0.875	16	6	4	30	47	83
M2054-8 SI	2906A-1	8	8	20	54	75.25	3.25	18	11.25	6	42.75	64	237
M2464-10 SI	2907A-1	10	10	24	64	85.75	3.75	18	12.75	6	51.25	73	369
M2872-12	2908A-1	12	12	28	72	96.375	4.375	20	14.5	6	57.5	81.875	548
M3080-14 SI	2909A-1	14	14	30	80	108.5	4.5	24	15.5	6	64.5	93	797
M3690-16 SI	2910A-1	16	16	36	90	119.25	5.25	24	17.25	6	72.75	102	985
M3896-18 SI	2911A-1	18	18	38	96	130	6	28	19	6	77	111	1150

*For price information see Section 2 Page 1

*Note Estimated weight only

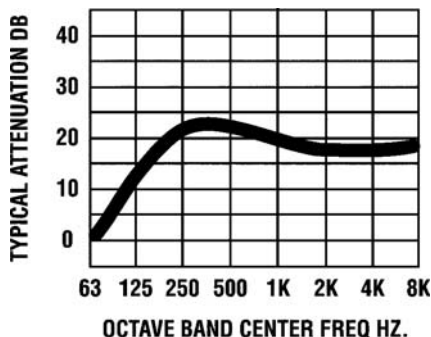


Recommended Applications:

- Construction
- Logging
- Oil Fields
- Irrigation Pumps
- Areas where background noise is relatively high

Features:

- Attenuation 15 - 22 dBA
- Bird screen on outlet end included
- Heavy duty welded
- High temperature primer and paint
- Inlet connections pipe thread to 3.5", larger sizes flanged
- NOTE: OEM units may be manufactured with slip fit inlets on all sizes
- Dimension "J" may be changed to conform with engine specifications

*NOTE: BIRD SCREEN ON OUTLET END

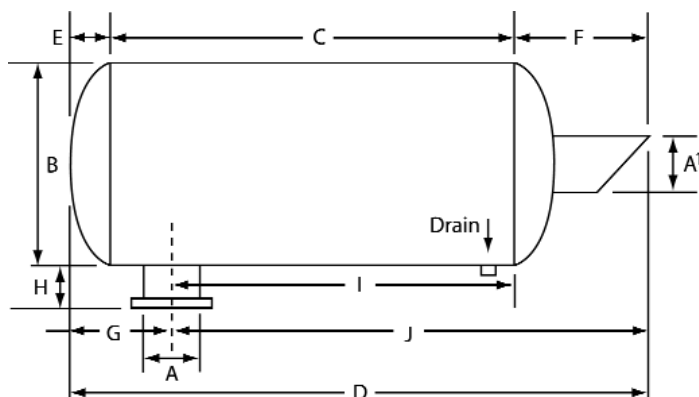

Accessories:

- Flexible Connectors
- Mounting Bands
- Hanger Brackets
- Gaskets HiTemp
- Nuts & Bolts
- Flanges
- Wye Connectors
- Optional materials available like Corten and Stainless Steel
- Explosion Relief Vents
- Inspection Ports
- Wall & Roof Thimbles
- Insulated Blankets
- Mitered Exhaust Pipe Extension with Bird Screen
- Rain Caps
- Flanged Spools

